


HOSETRACT

HOSE REELS

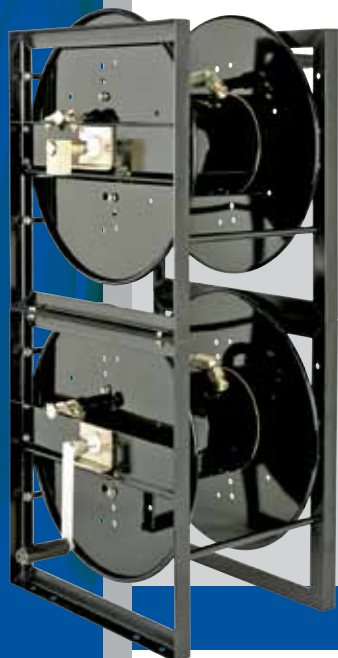


Pictured as two units.
Each sold separately.

All reels shipped less
hose unless requested
on quote basis.

Mounting holes 1/2" dia.

SERIES	DIMENSIONS		
	A	B	C
SFM 10	10	12 $\frac{3}{4}$	21 $\frac{1}{2}$
SFM 15	15	18 $\frac{1}{2}$	27 $\frac{1}{2}$
SFM 20	20	23 $\frac{1}{2}$	32 $\frac{1}{2}$
SFM 25	25	28 $\frac{1}{2}$	37 $\frac{1}{2}$

Inlet — 1/2" Female Through Swivel Max. Temp. — 200°F

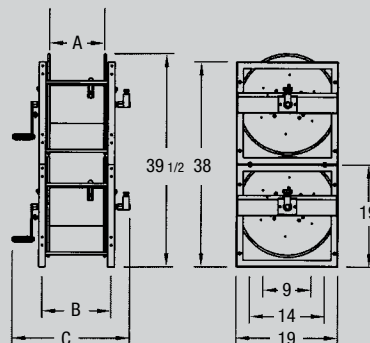

For 3/8" and 1/2" Hose I.D.

Stack Frame

MANUAL DRIVEN HOSE REELS. REEL is ideally applied where long lengths of hose are required, as in Agriculture, Power Wash, Pest Control and Construction trades. Hose can be dispensed and retracted with greater ease and expedience than coiling by hand.

FEATURES

- Flow through shaft for universal installation
- Stack capability with no added parts
- Self lubricating ABS bearings
- External swivel - heavy duty 4000 PSI for longer service
- Fully adjustable brake - adjust tension with hand knob
- Positive lock pin
- Mounting base is light and strong
- 3 or 4 roller kits can be mounted top or bottom position (sold separately)

Model Number	Operating Pressure	Capacity Hose I.D.		Shipping Weight
		3/8"	1/2"	
SFM 10-5	4000 PSI	250 FT.	175 FT.	40#
SFM 15-5	4000 PSI	350 FT.	275 FT.	49#
SFM 20-5	4000 PSI	450 FT.	375 FT.	59#
SFM 25-5	4000 PSI	550 FT.	475 FT.	72#

Roller kits available in 3 or 4 roller configurations. Sold separately.
Recommended stacking limit at two units high.